



ref. **1050**


Waterfall in stainless steel AISI 316L (Marine quality).







Α	в	с	D	E
500	140	370	90	120
19,69	<i>05,51</i>	14,57	<i>03,54</i>	<i>04,72</i>
1000	140	370	90	120
<i>39,37</i>	<i>05,51</i>	14,77	<i>03,54</i>	<i>04,72</i>
		Measures in mm Mesures in inch		

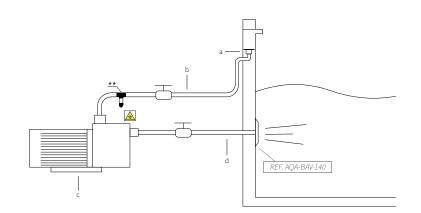

MOUNTING SYSTEM

The waterfall to embed in work.

- 1 1/2" female fitting for width 500mm and 2" female for width 1000mm, both centered at the bottom of the waterfall.
- 2) Fix the earth connection.
 - a) Impulsion tube Ø50mm (width 500) and Ø63mm(width 1000).
 - b) Self-priming pump:

1050 (500): 1,5hp - 21,5m³/h (Ref. AQA-B21). 1050 (1000): 2hp - 26,6m³/h (Ref. AQA-B26).

c) Aspiration tube 2" (Ø63mm).

*Pneumatic or electric button to be defined in work.

**AQA recommends to install a POOL PROTECTOR to avoid corrosion of the existing stainless steel elements in the pool.