





REF. 111A


Waterfall in stainless steel AISI 316L (Marine quality). Polished or satin finish.




Support Included



Nuts Included



Earth Connection

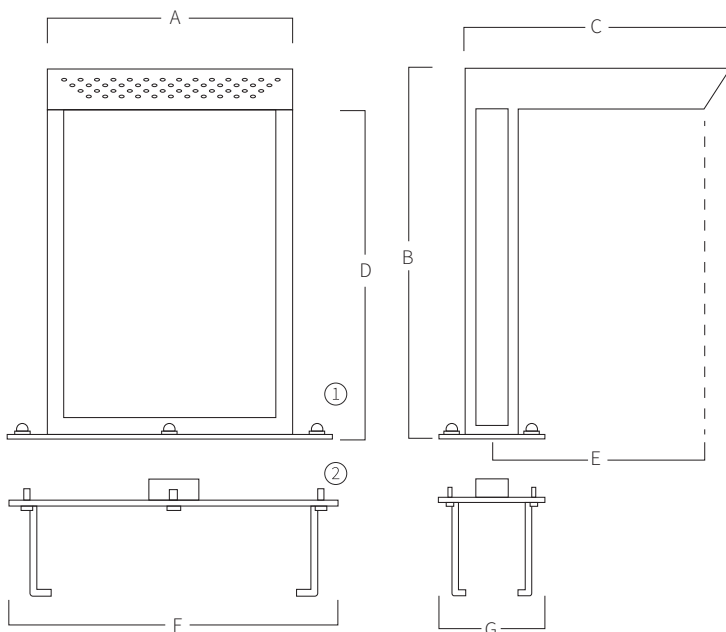

| A | B | C | D | E | F | G |
|---------------|--------------|--------------|--------------|--------------|---------------|--------------|
| 300 11,81 | 700 27,56 | 500 19,69 | 650 25,60 | 450 17,72 | 400 15,75 | 200 07,87 |
| 500 19,69 | 700 27,56 | 500 19,69 | 650 25,60 | 450 17,72 | 600 23,62 | 200 07,87 |
| 700 27,56 | 700 27,56 | 500 19,69 | 650 25,60 | 450 17,72 | 800 31,50 | 200 07,87 |
| 1000 39,37 | 700 27,56 | 500 19,69 | 650 25,60 | 450 17,72 | 1100 43,31 | 200 07,87 |

Measures in mm
Measures in inch

- ① Nuts to fix waterfall.
- ② Support to embed in the ground level.

MOUNTING SYSTEM

- 1) Connect the water intake to the support with 2" female fitting.
- 2) Fix the earth connection to the support.
- 3) Embed the support to get the platen at ground level.
- 4) Fix the waterfall with the nuts.

a) Impulsion tube 2" (Ø63mm).

b) Self-priming pump:

111A (300): 1hp - 17,3m³/h (Ref. AQA-B17).


111A (500): 1,5hp - 21,5m³/h (Ref. AQA-B21).

111A (700): 2hp - 26,6m³/h (Ref. AQA-B26).

111A (1000): 3hp - 38,8m³/h (Ref. AQA-B38).

c) Suction tube 2" (Ø63mm).

*Pneumatic or electric button to be defined in work.

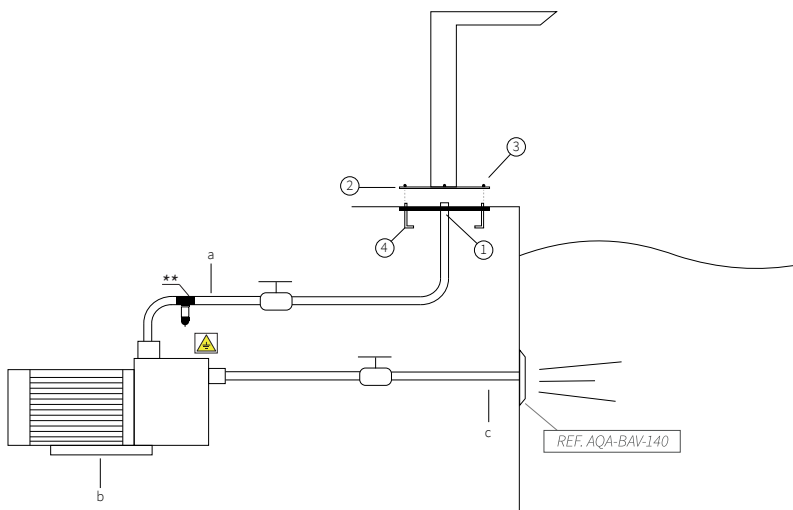

**AQA recommends to install a POOL PROTECTOR to avoid corrosion of the existing stainless steel elements in the pool.