



RECESSED SPOTLIGHT 4.3061

UNDERWATER

IP68



- › Linear illumination for swimming pools
- › Up to 4140 lumen light intensity
- › With swivelling LED unit



4.3061 | RECESSED LINEAR SPOTLIGHT

FOR ILLUMINATION AND ACCENT LIGHTING IN SWIMMING POOLS AND WATER ATTRACTIONS.

IP68	STAINLESS STEEL V4A 1.4571 316Ti	ELECTRO POLISHED	POW-LED INCL.	3.000 K 4.500 K 6.000 K BLUE	RGB	CONSTANT CURRENT KONSTANT STROM	DALI 1-10 V OPTIONAL DIMM	CABLE INCL.	max 5m			1.5t		
------	--	------------------	---------------	---------------------------------------	-----	------------------------------------	------------------------------	-------------	--------	--	--	------	--	--



- Protection class IP68 – up to 5m water depth
- Entirely made of stainless steel 316Ti 1.4571
- Rectangular cover, made of stainless steel 316Ti, height 5 mm
- ...
- POW-LED cold white, warm white, neutral white
- POW-LED blue
- POW-LED RGB
- operating mode: constant current
- ...
- rotation-symmetric light distribution
- temperature controlled (NTC)
- adjustable +/- 15°
- ...
- Constant-current power source/RGB Controller external
- Cable gland PG11, stainless steel 316Ti
- Installation housing made of stainless steel 316Ti with 1.5 m cable protection tube and connection socket (order separately)
- Supplied with lamp and 3m of underwater cable

★ PRODUCT LINE



4.3030
Recessed spotlights (exterior)
> Page 202



4.3060
Recessed spotlights (exterior)
> Page 204



4.3090
Recessed spotlights (exterior)
> Page 210




4.3012
Recessed spotlights (exterior)
> Page 214




RECESSED SPOTLIGHT 4.3061

UNDERWATER

IP68

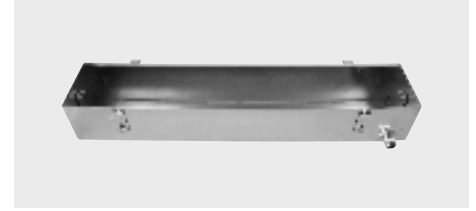

Installation housing

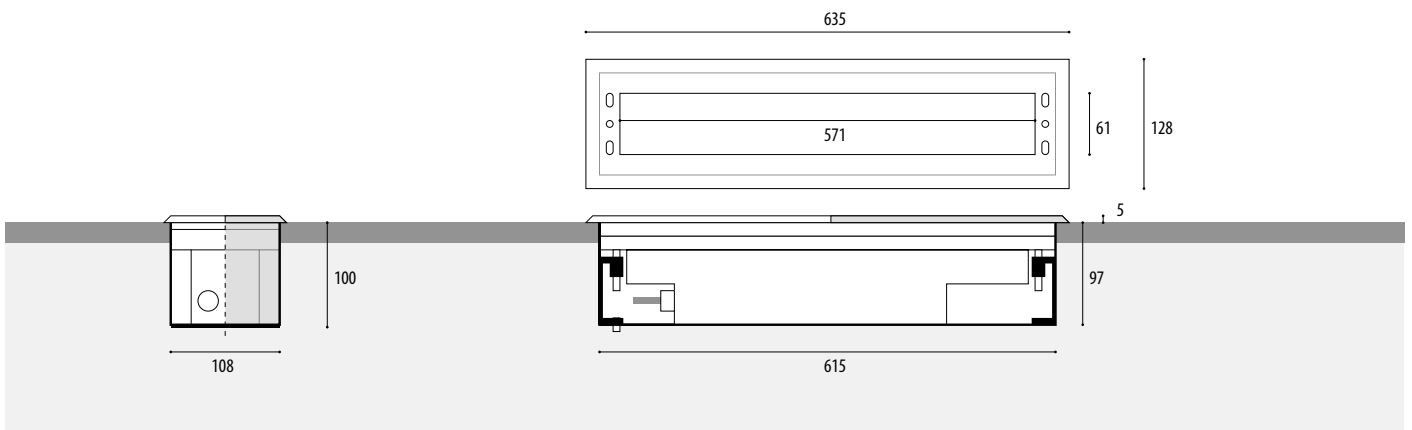

Article number	Lamps	Lumen	Light colour	Wattage	Current	Radation angle	Cable, installs
VERSIONS: ONLY UNDERWATER OPERATION							
POW-LED, RADATION ANGLE 30° (MEDIUM)							
4.3061.40.11	18 POW-LED	4140 lm	6000K cold white	total 48 W	CC 700 mA @24 V-DC	30° medium	UW, 8x0,5 qmm
4.3061.40.12	18 POW-LED	2700 lm	3000K warm white	total 48 W	CC 700 mA @24 V-DC	30° medium	UW, 8x0,5 qmm
4.3061.40.13	18 POW-LED	2880 lm	4500K neutral white	total 48 W	CC 700 mA @24 V-DC	30° medium	UW, 8x0,5 qmm
4.3061.40.16	18 POW-LED	610 mW/LED	royal blue	total 48 W	CC 700 mA @24 V-DC	30° medium	UW, 8x0,5 qmm
4.3061.40.19	18 POW-LED		RGB	all on 50 W	CC 700 mA @24 V-DC	30° medium	UW, 8x0,5 qmm

INSTALLATION HOUSING

4.3061.01.00 made of V4A stainless steel with 1.5m protective cable tube and M20 plastic terminating connection, for welding into stainless steel pools and for installation in concrete pools with tile covering



RECESSED SPOTLIGHT
4.3061



IP68

UNDERWATER

< Project
Familienbad DeBaalje, Aurich, Germany
Photos: Frederick Schmidt

NOTE



Matching installation housing should be selected, depending on the installation type and situation.

OPTIONS

Possible beam angle POW-LED



POW-LED monochrome, single colour in green, red, amber, turquoise



Installation housing for other pool types or flush cover version on request.



Variant as surface-mounted spotlight available (tiltable from 180 °)

Power supplies Technical details see from page 234.

5.0670.00.18

5.0670.00.18 Constant Current power supply,
5.0670.00.18 max 1 spotlights

5.0670.00.18

5.0670.09.18 RGB-Controller, max 1 spotlights